



AX-360

Smart P2P IP Camera for Home Security & Smart Home

AX-360 is a megapixel IP camera integrated with video surveillance and alarm system. This camera supports WiFi for easy network connection and can deliver high quality 720P video. It comes with IR Cut filter and IR LED to realize 24 hours day & night monitoring.

This camera supports 2-way audio intercom with an embedded microphone and speaker. It supports D-WDR (digital wide dynamic range) function to improve the quality of video. Besides, there is a micro SD (TF) card slot for on-board video storage (Max. 32G).

It supports P2P and push video function. Once an alarm occurs, users can receive push alert and watch real-time video in cellphone app. It is also very convenient for user to check recording videos from our cloud.

AX-360 can work with maximum 32 channels external wireless security accessory like gas detector, CO detector, Smoke detector, Door sensor, etc. User can easily DIY an useful surveillance and alarm system, setting up versatile video alarm linkage network. It is also compatible with our smart IR remote controller, which allows user to remotely control household electronic equipments like air-conditioner, television and lock through cellphone. AX-360 is an ideal IP camera for home security and smart security.

Features :



P2P Cloud Connection, no need DDNS



Plug and Play IP camera, fast device configuration by Microwave



360 degree rotation angle for any direction



Two-way audio communication



Supports Micro SD card for local storage



Supports 32 channels alarm signal input and smart home control

Featured Functions



PIR Human Motion Detection

If any intruder is detected, camera will give alert and start to record.



Wireless Video and Alarm System

A range of security detectors are compatible with the IP camera to realize real-time video and alarm monitoring.



P2P cloud and Push Video

If any alarm is occurs, user will receive an Push alert and click to alarm video right away through Ansee Cloud.




Smart Home Control

The IP Camera is compatible with Ansee IR remote controller, allowing user to remotely control household electronic equipments through cellphone.

Specifications

| Model Name | AX360 | |
|----------------------------------|----------------------------|---|
| Image Sensor | Sensor | 1.3MP CMOS Sensor |
| | Lens | f=3.6mm, F=2.0 |
| | Angle | 70 degree |
| Video | Video Format | PAL & NTSC |
| | FPS | 25 |
| | Resolution | 1280*720, 640*360 |
| | Video output | H.264 dual stream |
| | White Balance | Auto |
| | Backlight Compensation | Auto |
| | IR Distance | Around 10M |
| Audio | Input/Output | Embedded Microphone and Loudspeaker |
| | Audio Compression | SPEEX (8KHz or 16KHz) |
| Network | Wi-Fi | Supports IEEE 802.11b/g/n protocol, Supports wireless security standards: WEP (40bit/ 128bit), WPA (AES), WPA2 (AES),OPEN |
| Alarm | Wireless Alarm Input | 915MHZ/FSK Two-way;Valid Distance ≥ 30M (open area); Max. 32 channels |
| | PIR Motion Detection | High Sensitivity, valid 6m distance, valid angle 60 degree |
| | Alarm File Format | JPG |
| | Alarm Alert | APP Push |
| Device Working Status Indication | Network disconnected | Yellow LED @ Normal On |
| | Network Setting in process | Yellow LED @ Slow Flash |
| | Arming | Red LED @ Normal On |
| | Disarming | Green LED @ Normal On |
| | RF Delivering Data | Green LED @ Fast Flash |
| | Watching Real-time Video | Red & Green LED @ Slow Flash |
| Hardware Interface | Power | 5V 1A DC or Micro USB port,Power Consumption ≤ 5W |
| | Reset | 1 |
| | Micro SD Card Port | 2.0 @Max. 32G |
| Working Environment | Temperature | -5℃ ~40℃ |
| | Humidity | 35% ~45% |
| | Storage Temperature | -40℃ ~70℃ |
| General Info. | Measurement (L*W*H) | 104*65*41mm |
| | Net Weight | 0.3KG |

Product interface description

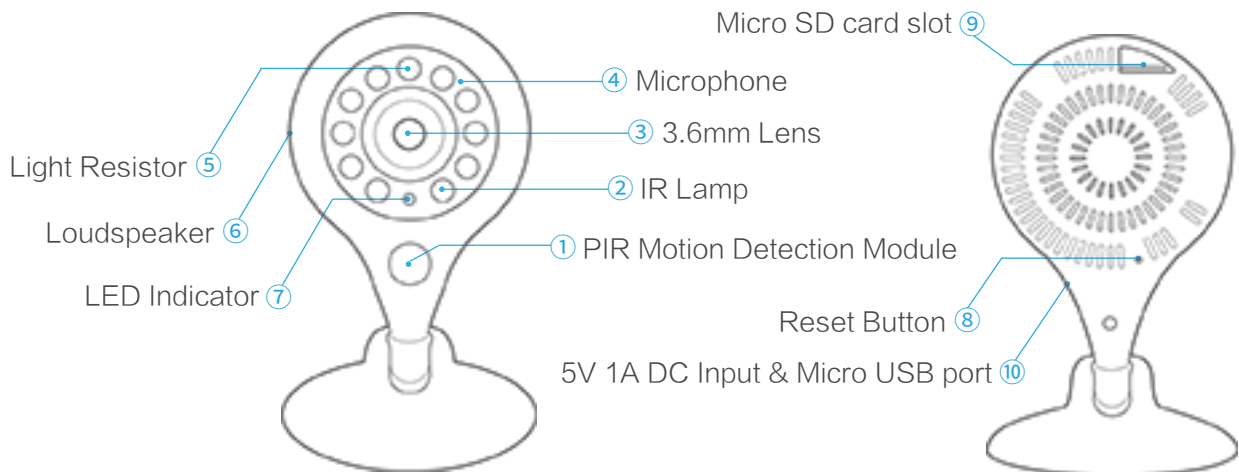

Optional Accessories



IR Motion Detector



Door Sensor Detector



Fuel Gas Detector



CH₂O Detector



Smoke Detector



CO Detector

Ansee Co. Ltd

Add: Building A, GuanLong First Industry Park,
XiLi Town, NanShan District, Shenzhen, China
(518055)

Tel: 0755-86521099/86522966

Fax: 0755-26984949

Email: sales@anseetec.com

Web: www.anseetec.com

© Copyright 2016. * All Rights Reserved*Design and specifications are subject to change without notice.