



AX-403A

Smart PT IP Camera for Home and Business

AX-403A is a PT IP Camera offering exceptional 720P Resolution. It can realize 360 degree horizontal and vertical 100 degree rotation. The camera also supports preset position and patrol function. It is integrated with alarm host module. When alarm occurs, the camera will rotate to monitor alarm area, take snapshot and record.

This camera has built-in microphone and speaker, allow users to make two-way audio communication remotely. It supports D-WDR (digital wide dynamic range) function to improve the quality of video. Besides, there is a micro SD (TF) card slot for on-board video storage (Max. 32G).

It supports P2P cloud service, no need any DDNS or fixed IP address for remote monitoring in internet. The camera adopts our advanced microwave technology, which allows users to connect and configure device quickly and conveniently in cellphone app within several seconds. It is truly play and plug camera.

AX-403A is embedded with Wireless RF module, which can connect with maximum 32 channels external wireless security accessory like gas detector, CO detector, Smoke detector, Door sensor, etc. It also can work with AX-203 camera as alarm slave, receiving AX-203' s commands to take snapshot.

Features :



Supports P2P cloud function



H.264 video compression



IR Distance around 10m



Embedded Two-way audio communication



Micro SD card for local storage (32G)



PT control: Horizontal 355° and Vertical 100°



Supports WiFi




Supports Wireless alarm input

Specifications

Model Name	AX403A	
Image Sensor	Sensor	1.3MP CMOS Sensor
	Lens	f=3.6mm, F=2.0
	Angle	70 degree
Video	Video Format	PAL & NTSC
	FPS	25
	Resolution	1280*720, 640*360, 320*180
	Video output	H.264 dual stream
	White Balance	Auto
	Backlight Compensation	Auto
	IR Distance	Around 10M
Audio	Input/Output	Embedded Microphone and Loudspeaker
	Audio Compression	SPEEX (8KHz or 16KHz)
Network	Wi-Fi	Supports IEEE 802.11b/g/n protocol, Supports wireless security standards: WEP (40bit/ 128bit), WPA (AES), WPA2 (AES),OPEN
	Ethernet	10/100Mbps,RJ-45 export
Alarm	Wireless Alarm Input	915MHZ/FSK Two-way;Valid Distance \geq 30M (open area); Max. 32 channels
	Linear Alarm Input/Output	1*Input, 1*Output
	Alarm File Format	Video(3GP), Image (JPG)
	Alarm Alert	APP Push
Hardware Interface	Power	12V DC Power Consumption \leq 12W
	Reset	1
	Micro SD Card Port	2.0 @Max. 32G
	Audio output port	1
Working Environment	Temperature	-5°C ~40°C
	Humidity	35% ~45%
	Storage Temperature	-40°C ~70°C
General Info.	Measurement (L*W*H)	130*91.5*91.5mm
	Net Weight	800g
System Requirements	OS	Windows XP, Windows 7
	Browser	IE V9.0 and above

Product interface description

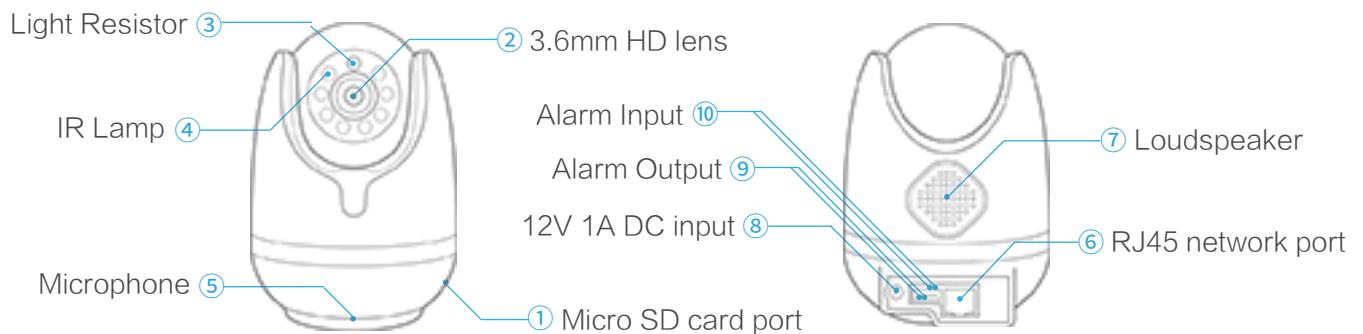

Optional Accessories



Ansee Co. Ltd

Add: Building A, GuanLong First Industry Park,
XiLi Town, NanShan District, Shenzhen, China
(518055)

Tel: 0755-86521099/86522966

Fax: 0755-26984949

Email: sales@anseetec.com

Web: www.anseetec.com