



# LK-01A Smart Exit Button

This smart exit button works as access controller. It can connect to one or two magnetic lock. By connecting with wireless keypad through radio frequency, user can control door locally through password or ID card. After adding the exit button to Ansee App, user is able to control door remotely in cellphone directly and check related unlocking records. If binding the exit button with ansee smart IP camera, when door is opened, IP camera will take snapshots and recording.

### **Features**



Supports 1ch/2ch Magnetic lock



Remote controlling door and checking records



Support local unlocking and locking



Video access control linkage function



Support to connect with Wireless Keypad to control door




Can connect to Ansee APP (Android & IOS)

## **Specifications**

Model Name	LK-01A(Smart Exit Button)
Working Voltage	DC12V 2A
Wireless Frequency	915M/FSK
Wireless Distance	> 50M (Open Area)
Installation Method	Compatible with traditional 86 mechanical switches
Locking current	1 door ≤ 0.5A; 2 door ≤ 1A
Unlocking current	≤ 0.1A

#### **Directions for Use**

1. Exit Button Interface Introduction:

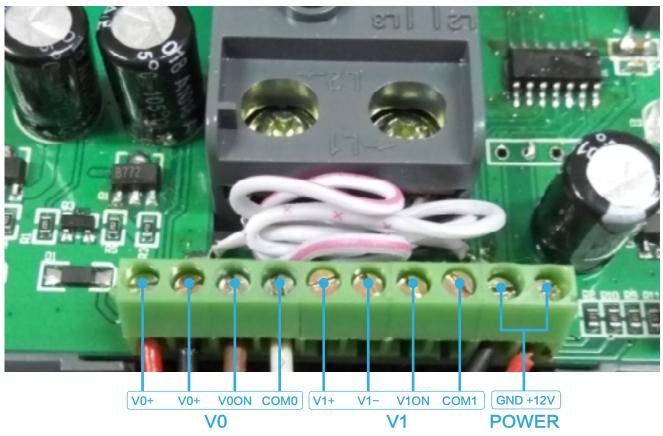

This smart exit button can connect with one door or two door.

When the J2 PIN jumps on, it is in single door status, Vo or V1 can be connected.

When the J2 PIN doesn't jump on, it is in double-door status, both V0 and V1 need to be connected.

- 2. The indicator light of Magnetic lock will be off when the door is closed. When lock is in unlock status, it will trigger automatic locking every 30s till locking successfully.
- (1) Local test: after locking, it can be unlocked by pressing exit button itself or control the lock through wireless keypad.
- (2) Locking/Ulocking remotely: after adding exit button to Ansee App, user is able to control door remotely in cellphone directly and check related unlocking records. For more information, please check the App operating instructions

Remote unlocking password: 1234 by factory default

If you need to change the unlocking password, only wireless keyboard can be used, for more information, please check the wireless keyboard operating instructions

#### **Attentions**

- 1. The wiring diagram of this smart exit button is the same as traditional exit button with lock. Please do not power on in installation and dismantlement.
- 2. Please attention to correct connection with one lock and two lock.

#### Ansee Co. Ltd

Add: Building A, GuanLong First Industry Park, XiLi Town, NanShan District, Shenzhen, China (518055)

Tel: 0755-86521099/86522966 Fax: 0755-26984949 Email: sales@anseetec.com Web: www.anseetec.com

© Copyright 2016. \* All Rights Reserved\*Design and specifications are subject to change without notice.