



AX-503R

Waterproof IR Bullet IP Camera

AX-503R is a waterproof IR bullet IP Camera, suitable for outdoor surveillance application. It adopts H.264 compression technology and reaches 1280*720 resolution. There is Array IR LED, realizing 24 hours day & night monitoring.

AX-503R supports P2P cloud connection without any DDNS map or fixed IP address. Users can access the camera anytime anywhere through cellphone, PC client software and Web Server. It is embedded with RF alarm module to link with maximum 32 channels external alarm detectors. It is very easy for you to DIY an video surveillance and alarm system for your house or office.

This camera can work with AX-203 or AX-403A as slave device to take snapshots or record as requested.

Features :



P2P Cloud Connection
no need DDNS



1280*720 Resolution



Digital WDR



IR Distance around 15m



Micro SD card for
local storage




Supports Wireless alarm input

Specifications

Model Name	AX503R	
Image Sensor	Sensor	1.3MP CMOS Sensor
	Lens	f=3.6mm, F=2.0
	Angle	70 degree
Video	Video Format	PAL & NTSC
	FPS	25
	Resolution	1280*720, 640*360, 320*180
	Video output	H.264 dual stream
	White Balance	Auto
	Backlight Compensation	Auto
	IR Distance	Around 15M
Network	Ethernet	10/100Mbps,RJ-45 export
Alarm	Wireless Alarm Input	915MHZ/FSK Two-way;Valid Distance \geq 30M (open area); Max. 32 channels
	Alarm File Format	Video(3GP), Image (JPG)
	Alarm Alert	APP Push
Hardware Interface	Power	12V DC Power Consumption \leq 12W
	Reset	1
	Micro SD Card Port	2.0 @Max. 32G
Working Environment	Temperature	-5°C ~40°C
	Humidity	35% ~45%
	Storage Temperature	-40°C ~70°C
General Info.	Measurement (L*W*H)	140*85*85mm
	Net Weight	0.8KG
	Waterproof Level	IP 66
System Requirements	OS	Windows XP, Windows 7
	Browser	IE V9.0 and above
	App	Android V4.0 and above , IOS V6.1 and above

Product interface description

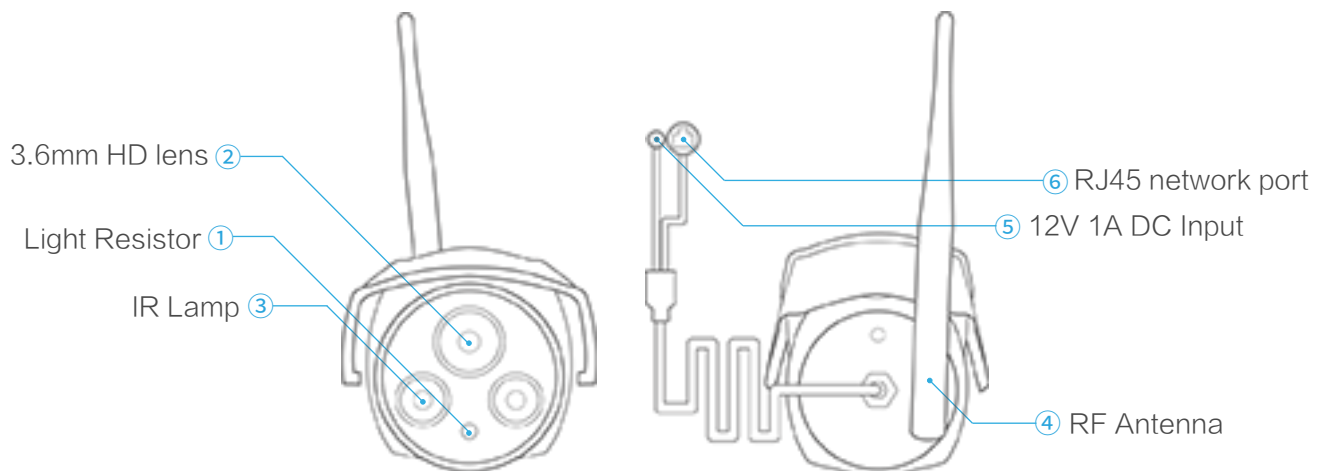

Optional Accessories



Ansee Co. Ltd

Add: Building A, GuanLong First Industry Park,
XiLi Town, NanShan District, Shenzhen, China
(518055)

Tel: 0755-86521099/86522966

Fax: 0755-26984949

Email: sales@anseetec.com

Web: www.anseetec.com